 (970) 279-7828

 sales@thermaline.us

 thermaline.us

THERMA FLASHING

ThermaFlashing uses patented technology to prevent ice from forming in problematic areas where walls meet roof structures.

The unique raceway secures a single run of UL-listed self regulating heat trace cable for a highly efficient, direct heat transfer to the panel. The ThermaFlashing is affixed with commercial grade adhesive, eliminating the need of roof deck penetration



RISK REDUCTION

ThermaLine defends against structural damage as well as slip and fall hazards.

ENERGY EFFICIENT

Replacing heat tape with ThermaLine can generate savings of up to 65%.

DURABILITY


ThermaLine cable is protected by the panel, decreasing expected maintenance to just once every 10 years.

CURB APPEAL:

Our panels are an attractive addition to your property and are offered in a variety of designs and colors.

SAFETY:

Patented technology, UL listed and compliant with NEC Article 426 requirements.

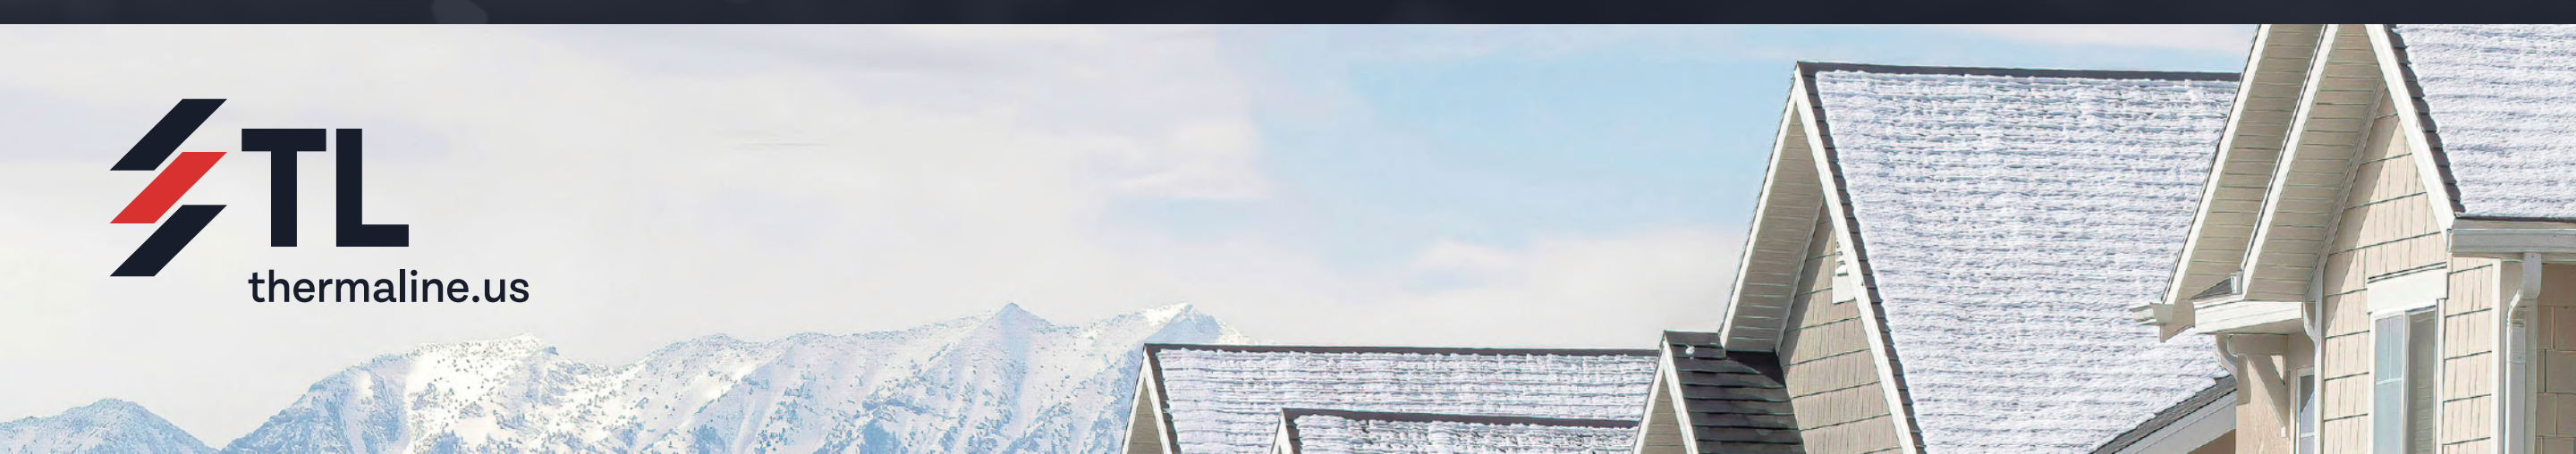

SPECIFICATIONS



Material Selection

.032 aluminum, 24 gauge steel or .021" copper

Dimensions

ThermaFlashing is available in 5' lengths and a number of widths: 3", 4" 6" and 8". Panels can be ordered flat or with a vertical bend.

Heating System

Commercial grade self-regulating heat cable, UL-approved for roof and gutter de-icing. Available in 240 or 120 volt and 6, 8, 10 or 12 watts.

Components

ThermaFlashing panels, heat cable, and commercial grade adhesive.


Electrical Requirements

120VAC or 208-277VAC. NEC Article 426.28 requires 30mA ground fault circuit protection for roof ice melt systems.

COMPLETE YOUR SYSTEM:

THERMASHINGLE


THERMAGUTTER

 (970) 279-7828


 sales@thermaline.us

 thermaline.us


COLORS AVAILABLE:




Matte
Black




Dark
Bronze




Medium
Bronze



Mansard
Brown



Copper



More
Colors

